


1.Function

EBS2U Series Surge protector device(hereinafter referred to as SPD) is used for power supply systems such as IT, TT, TN-C, TN-S, TN-CS, etc. for low-voltage AC distribution systems, for indirect lightning and direct lightning or other A surge of transient overvoltage is protected. The SPD has a common mode(MC) and differential mode(MD) protection. The SPD complies with GB/T18802.1/IEC61643-II.

2.Nomenclature

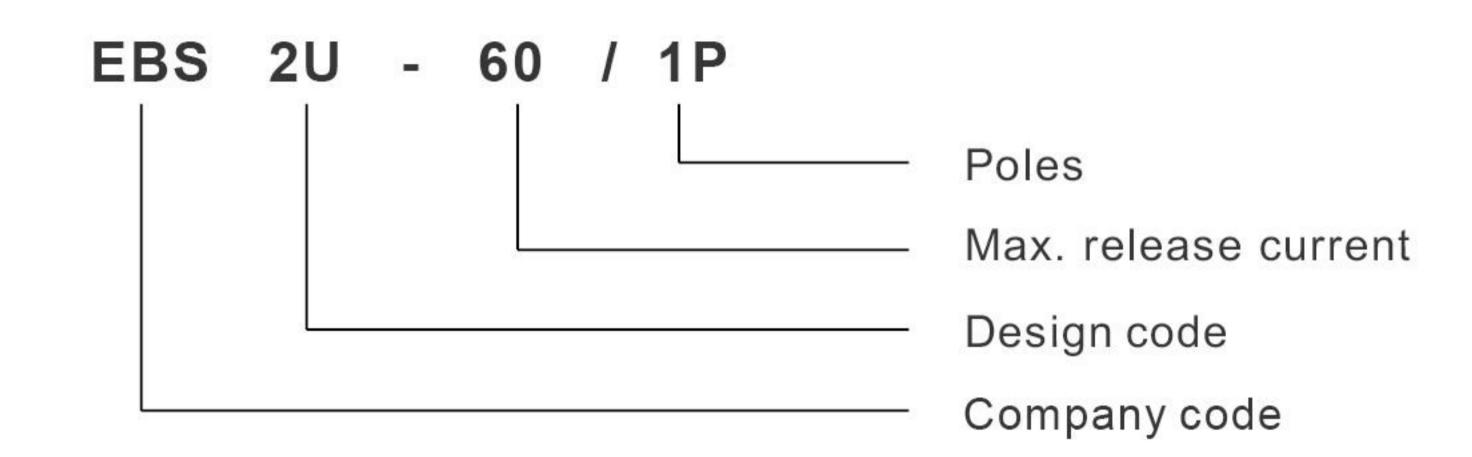

- Poles: 1P, 2P, 3P, 4P, 1P+N, 3P+N, 1P+NPE, 3P+NPE
- Max. Continuous operating a.c.voltage Voltage UC:140, 275, 320, 385, 420V
- SPD Type: T1, T2, T3
- □ Voltage protection level: Up 1.2, 1.5, 1.8, 2.0kV
- Maximum discharge current (8/20µs): Imax 10, 20, 40, 60, 80, 100kA
- □ Norminal discharge current (8/20µs): In 5, 10, 20, 30, 40, 50kA

3.Specifications


| Standard | | EBS2U-40 | EBS2U-40 N-PE |
|-------------------------------------|-------|-------------------------|-----------------------|
| According to IEC61643-11 | | Type 2 | Type 2 |
| Max. continous operation AC voltage | Uc | 275V AC | 255V AC |
| Norminal discharge current (8/20µs) | In | 20kA | 20kA |
| Maximum discharge current (8/20µs) | lmax | 40kA | / |
| Peak current (10/350) | Ipeak | / | 12.5kA |
| Voltage protection level (L-N) | Up | 1.5kV | 1.5kV |
| Response time (L-N) | tA | 25ns | 25ns |
| Environment temperature | Tu | -40°C~80°C | -40°C~80°C |
| Status indicator | | Green / red | Green / red |
| Mounting | | 35mm Standard Guide | 35mm DIN-rail |
| Cross section of wire (Min.) | mm² | 4mm ² | 4mm ² |
| Cross section of wire (Max.) | mm² | 35mm² | 35mm² |
| Casing material | | Thermoplastic UL94-V0 | Thermoplastic UL94-V0 |
| Protection grade | | IP20 | IP20 |
| Remote Signalling | | Optional | Optional |
| Dimension (LxWxH) | | 90x70x18/36/54/72mm | 90x70x18/36/54/72mm |
| Poles | | 1P, 2P, 3P, 4P, 1P+N, 3 | P+N, 1P+NPE, 3P+NPE |

001 www.timax-electric.com



4. Main Structure and Working Principle

In a three-phase four-wire system, protectors are connected between three phase lines and a zero line to the ground (Figure 1). Under normal circumstances, the protector is in a high resistance state. When surge overvoltage occurs in the power grid due to lightning or other reasons, the protector is turned on quickly in nanosecond time, and the surge overvoltage is introduced into the earth, thus protecting the electrical equipment on the power grid. When the surge voltage passes through the protector and disappears, the protector returns to the high resistance state again, thus not affecting the normal operation of the power grid. The electrical principle of surge protector is shown in Figure 2.

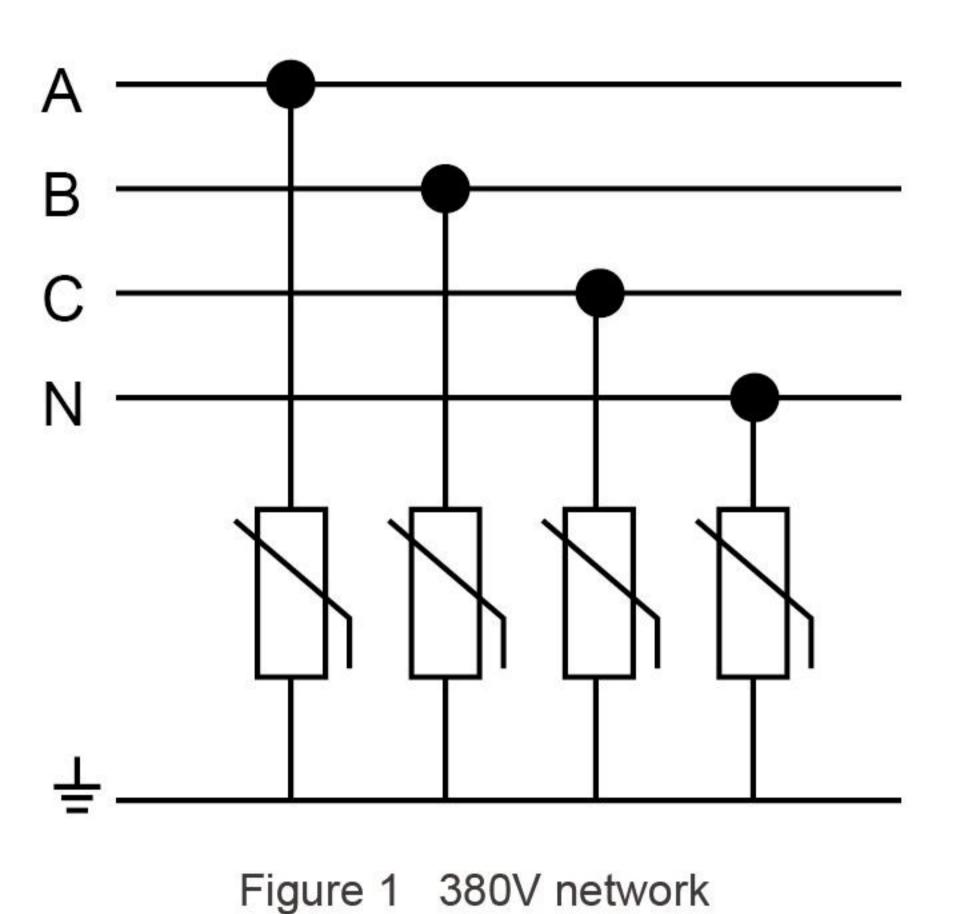


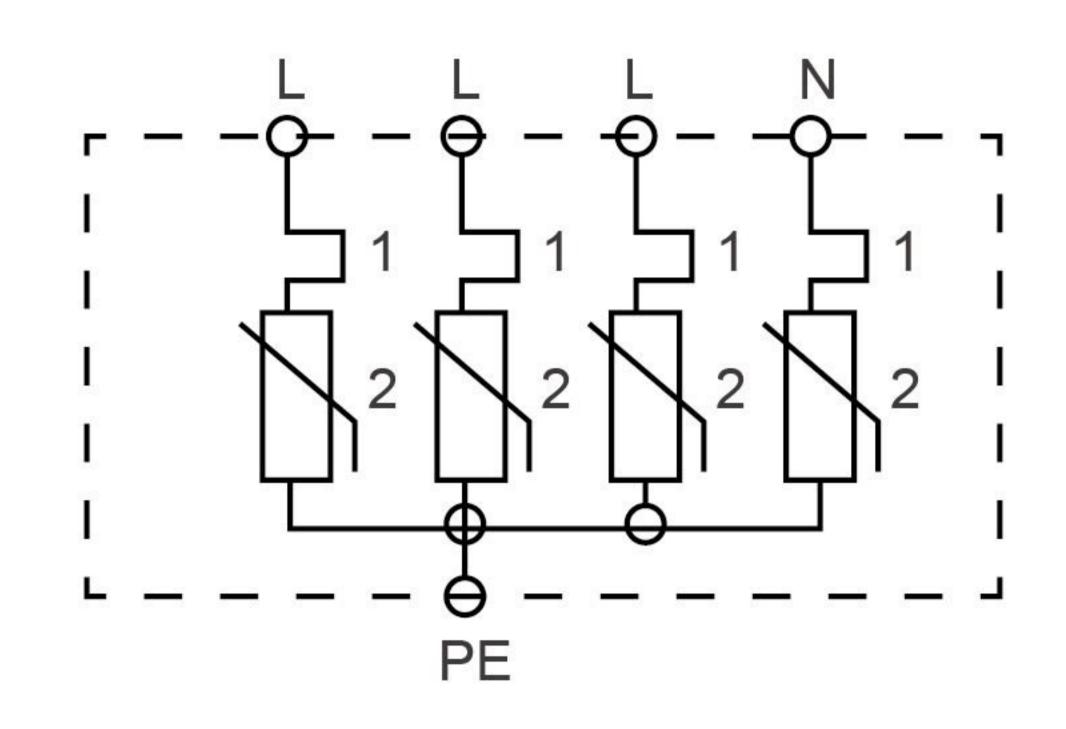



Figure 2 Note: 1.Thermal failure release 2.Varistor


www.timax-electric.com


5.Installation and Maintenance


- ☐ The protector is connected by copper wire, with a cross-sectional area of: Soft wire: 2.5-16mm² Hard wire: 2.5-25mm².
- ☐ The grounding wire shall be applied with double-color wires over 4mm².
- In order to prevent the surge protector from being damaged due to various factors or burned out due to transient overvoltage, each SPD must be protected by fuse or circuit breaker (MCB), and the breaking capacity of the circuit breaker must be greater than the short-circuit current at that place. The characteristic curve is C curve, and it can withstand the impact of SPD surge current without action or damage.
- □ See Figure 3, Figure 4, Figure 5 and Figure 6 for wiring diagram of low voltage system.
 Wiring diagram of low voltage system.
- ☐ After the protector is installed as required, it can automatically protect the Internet without adjustment.
- During the operation, it is necessary to regularly check whether the module signs are red, observe whether the fuse signs are red, and replace the failed components in time.

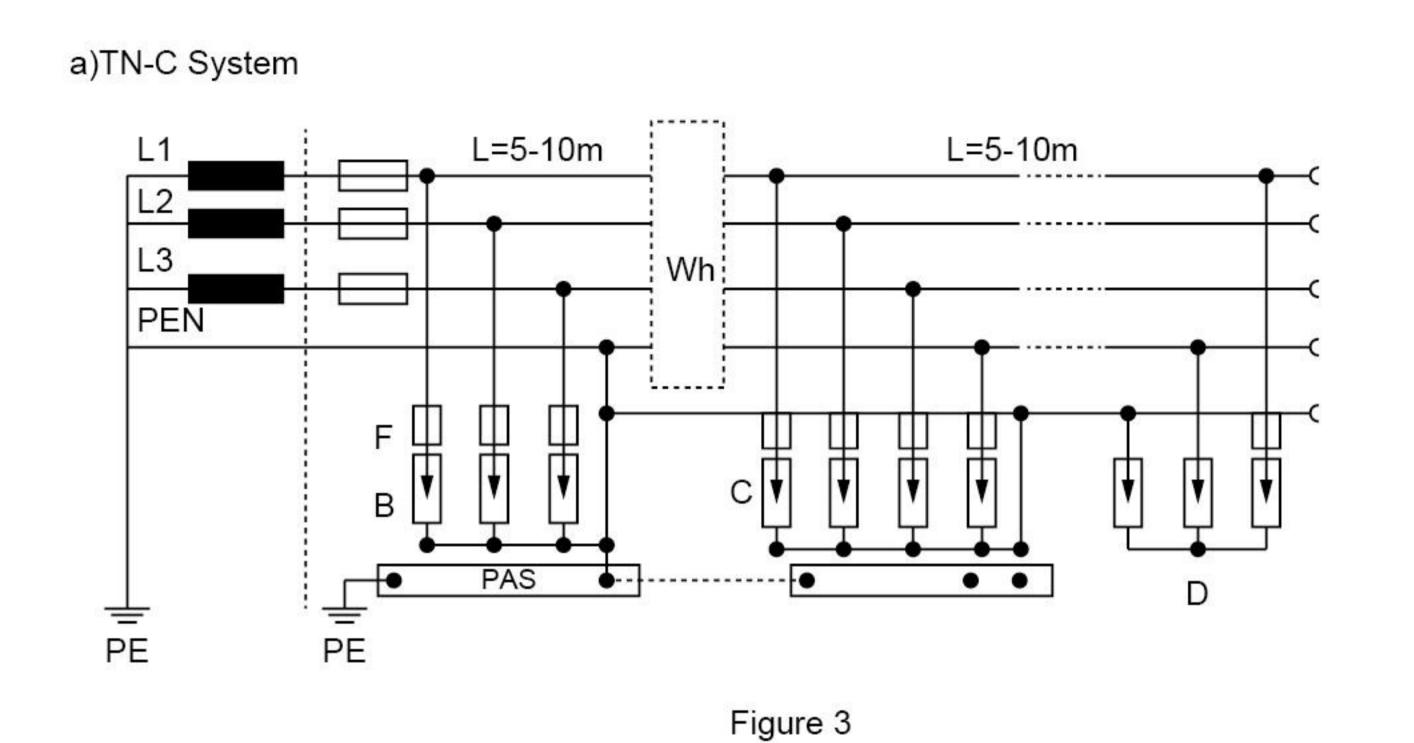


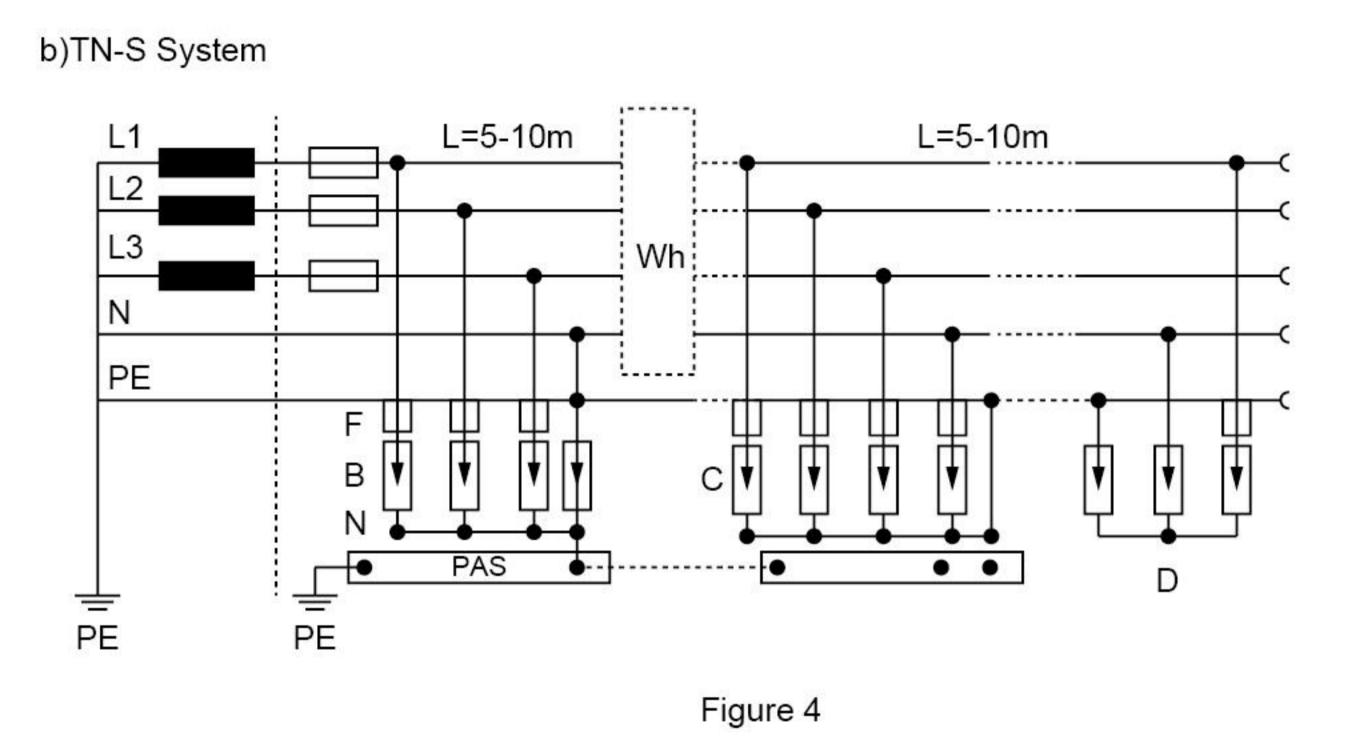


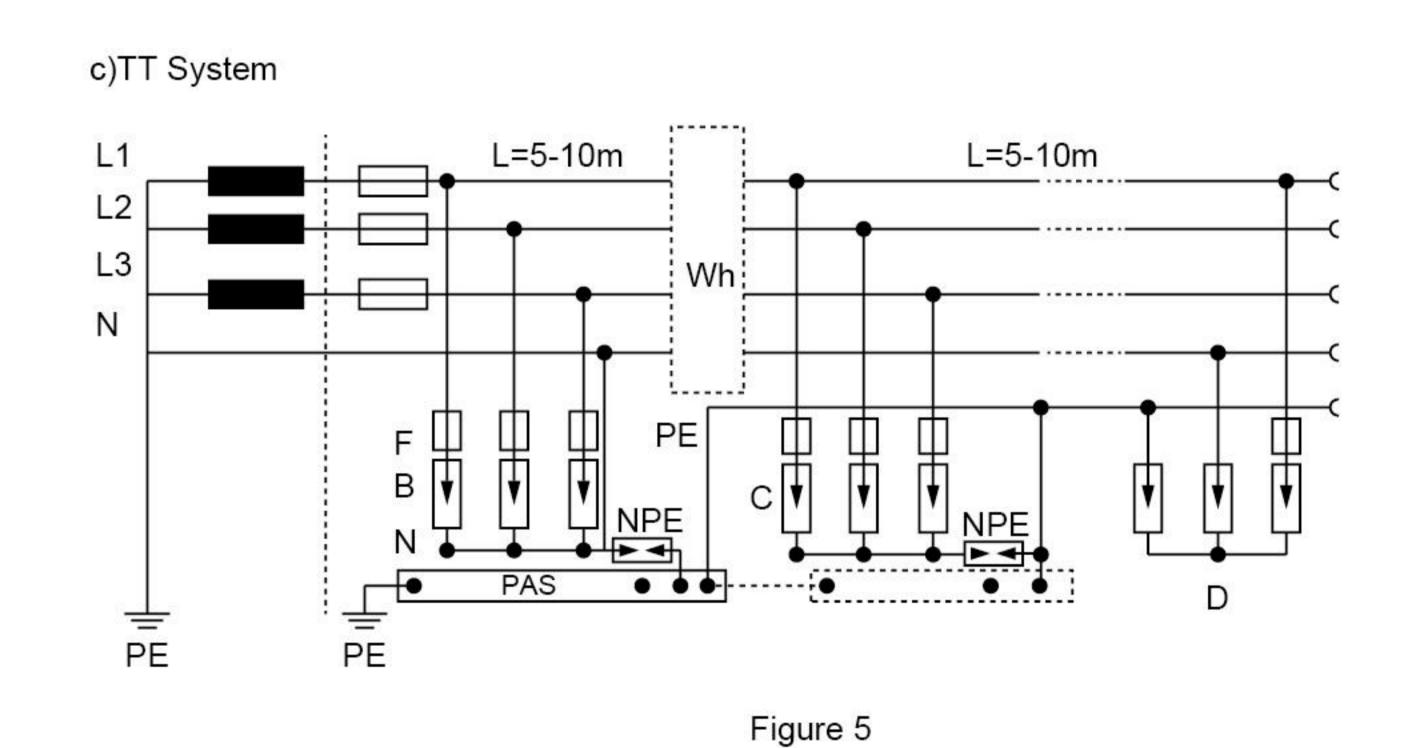

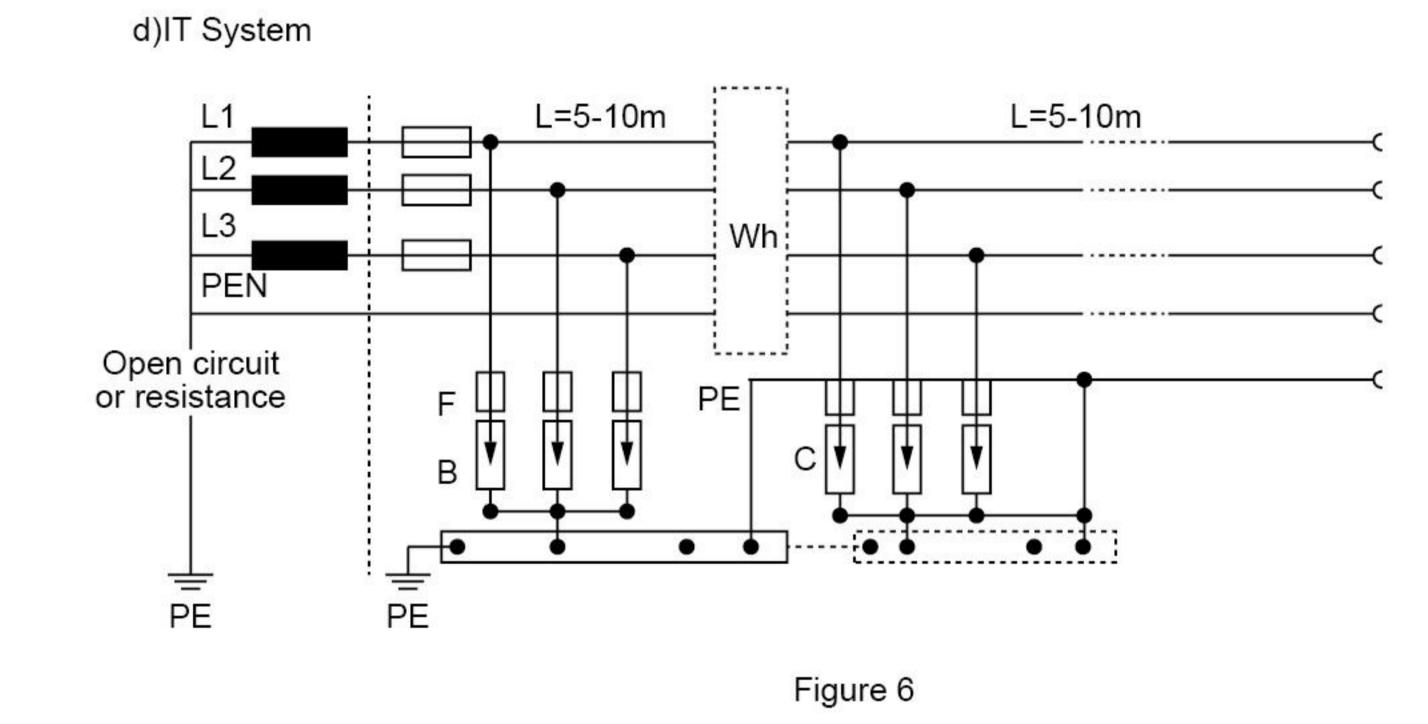


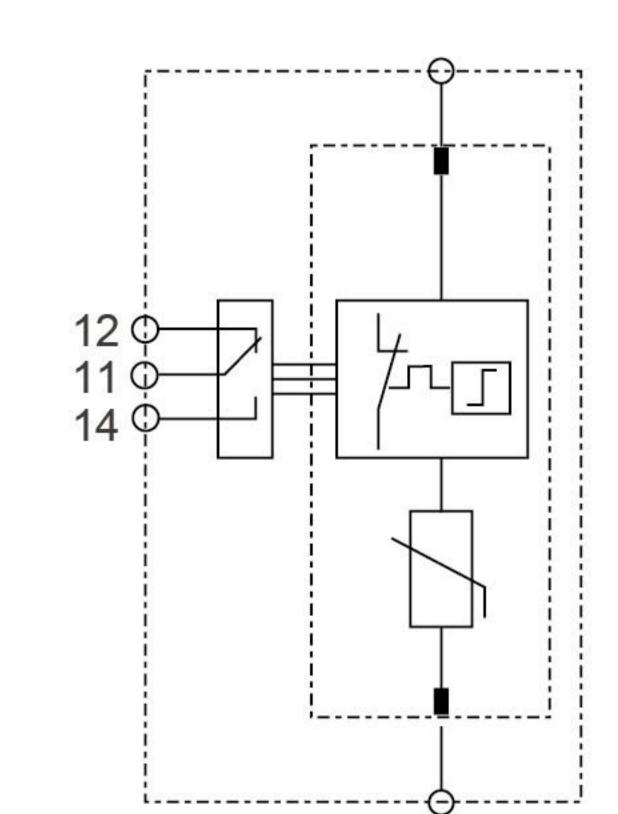

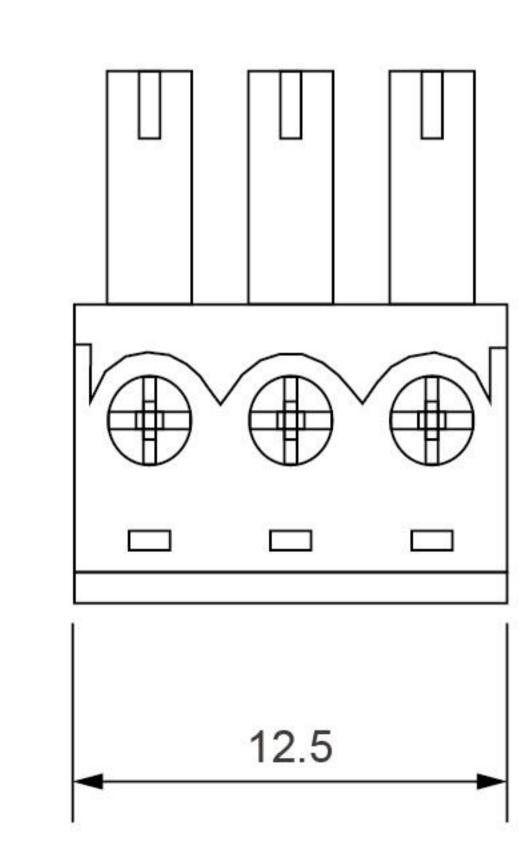

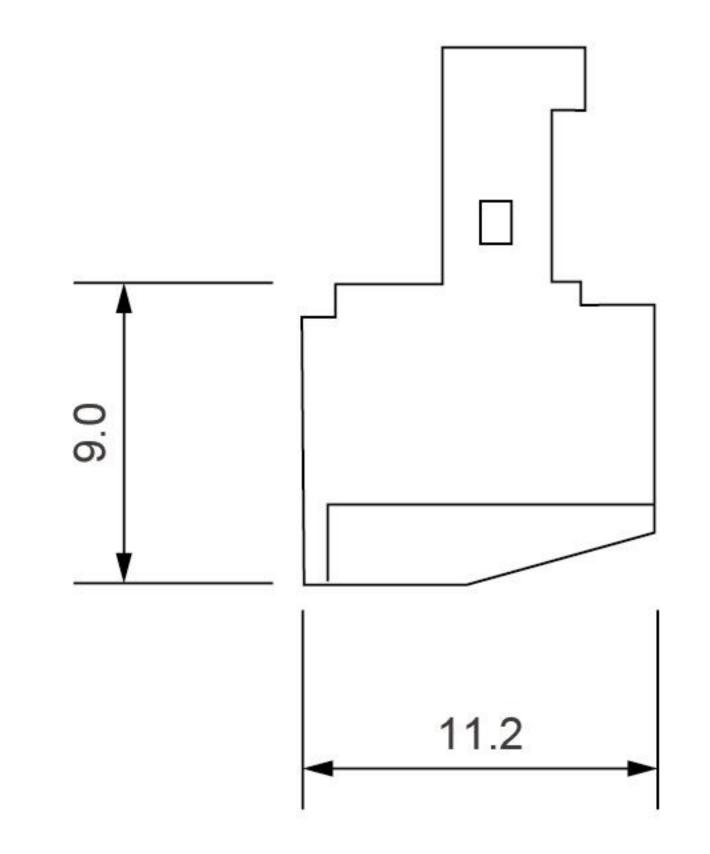

6.Application Schematic Selection of Surge Protective Device

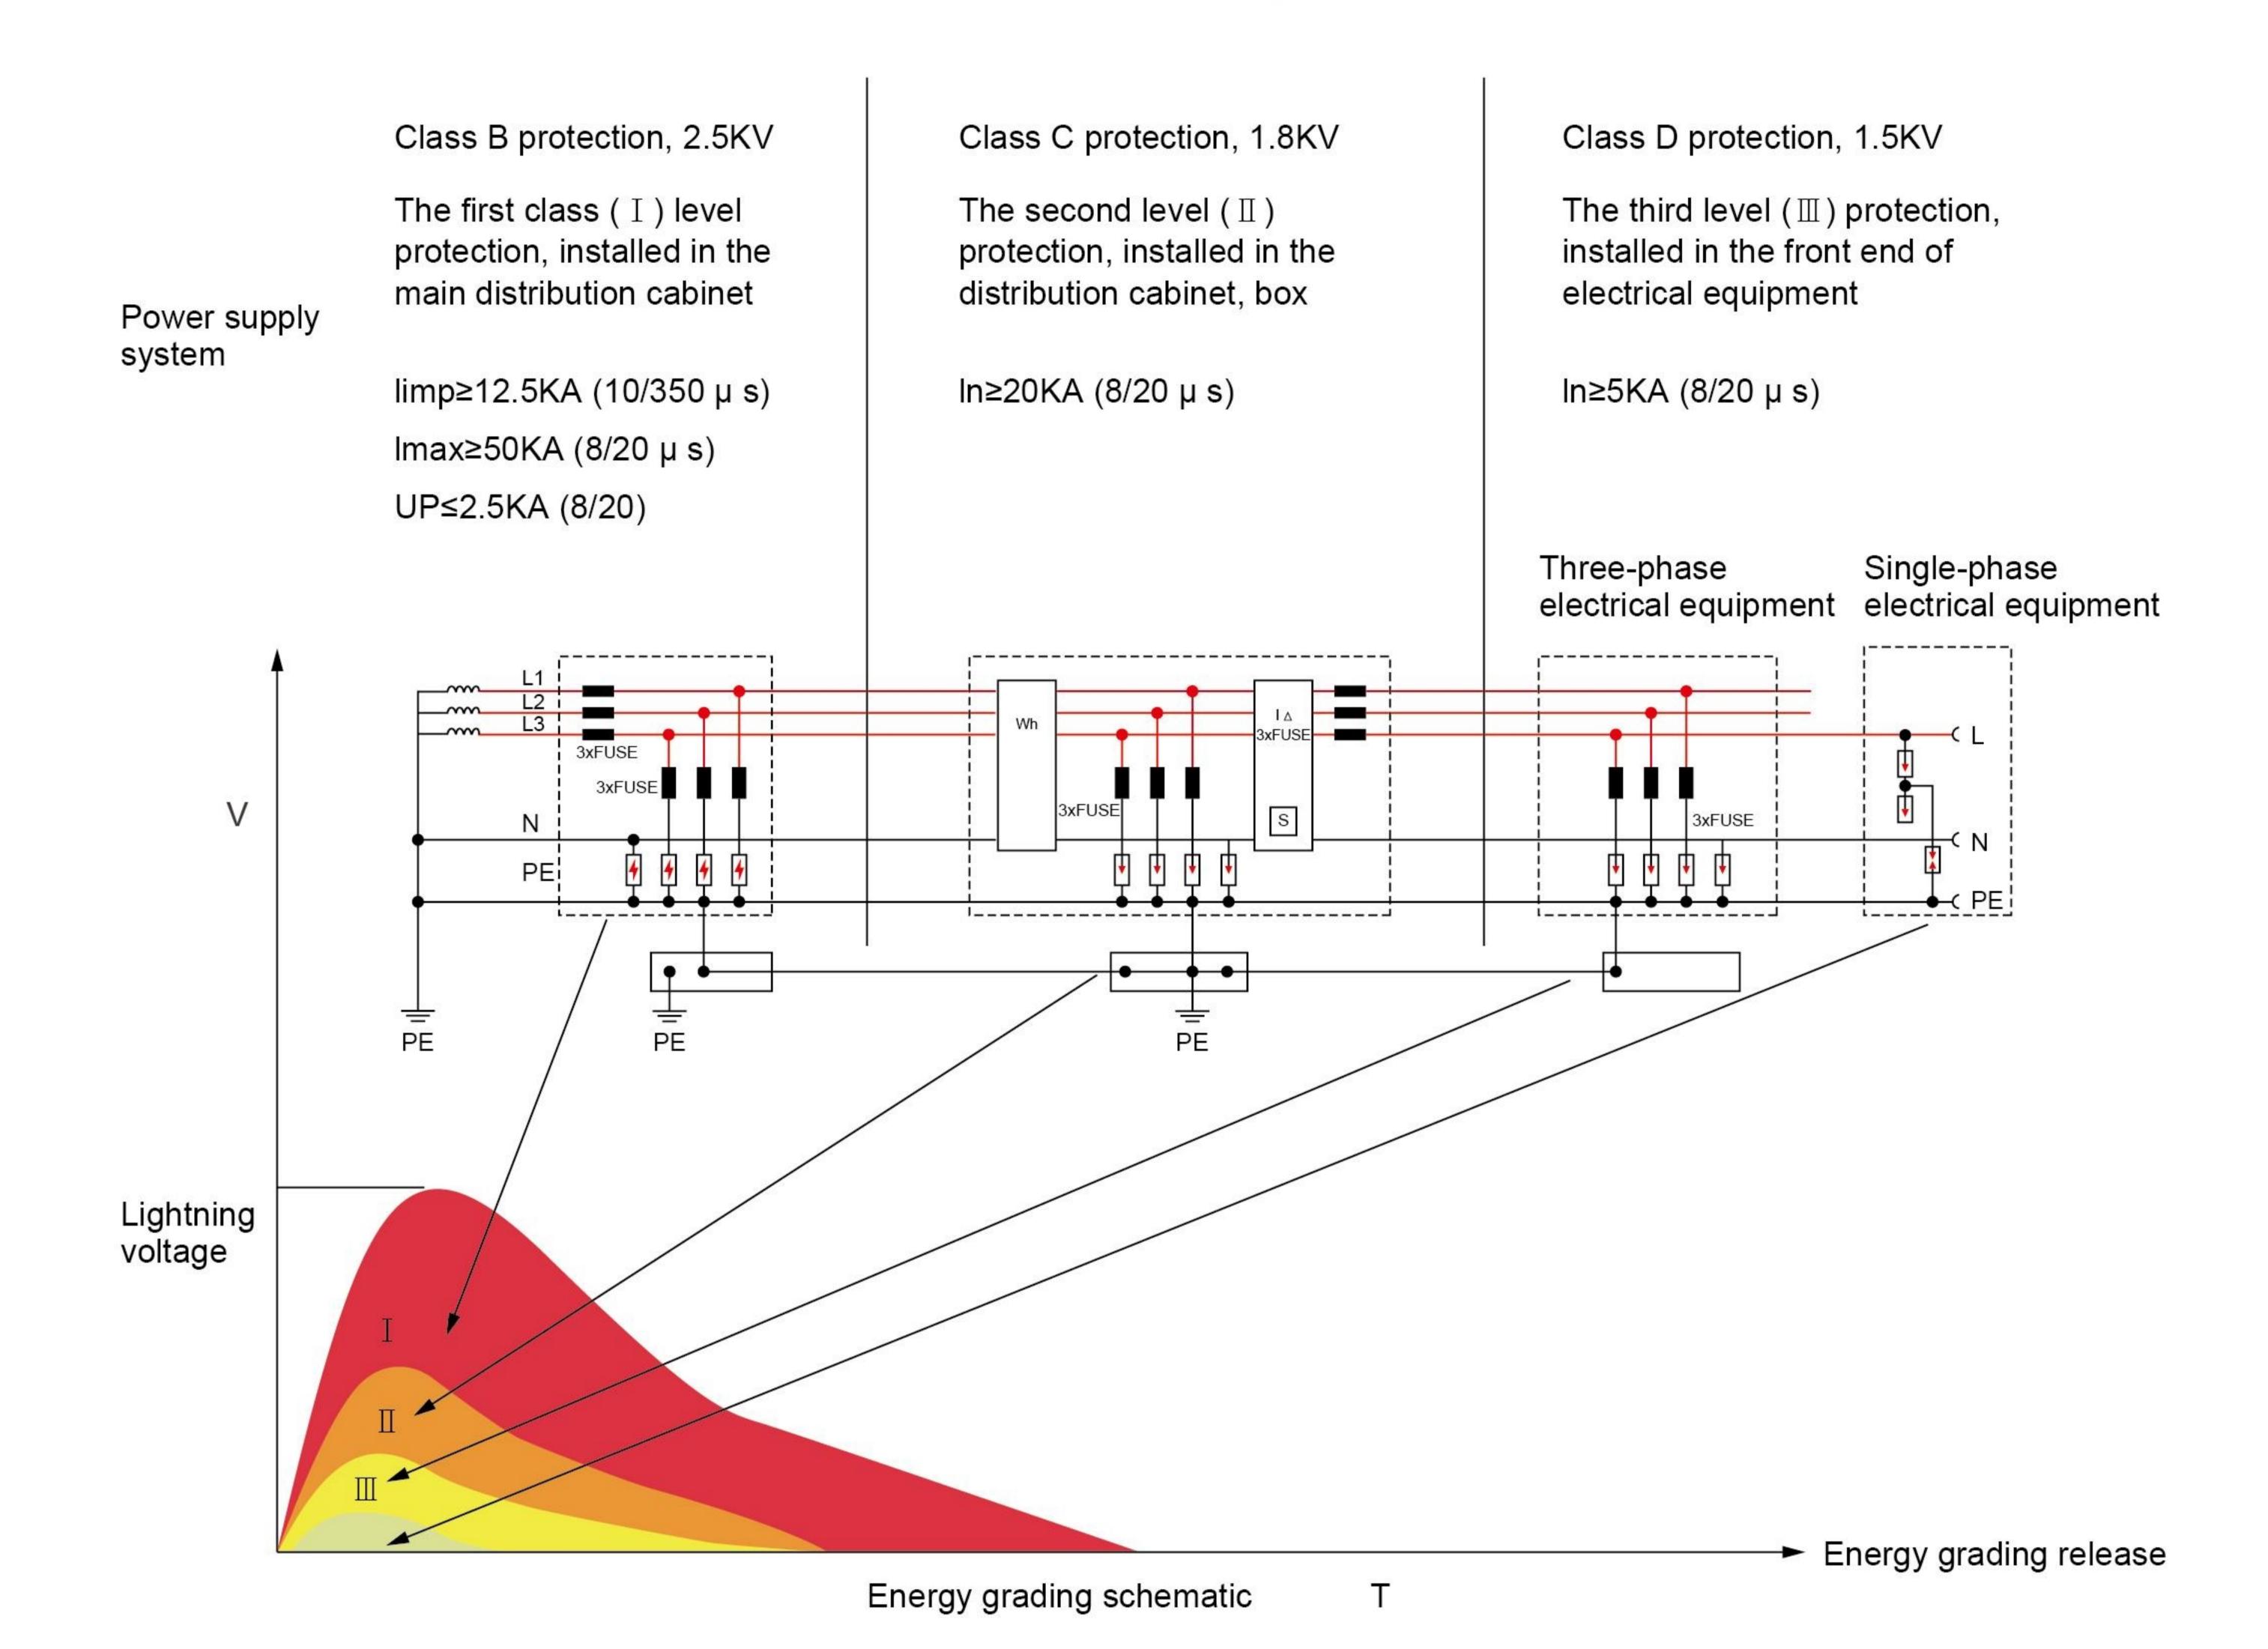

7.Order Note

| Following items should be marked when ordering | Ordering sample | |
|--|---|--|
| Product name, model&Poles | To order the EBS2U surge protector, Imax=60kA In=10kA, protection | |
| Protection level | level is C, 1 poles, Uc=140 and quantity is 100 pieces, should be | |
| Max.release current | marked: | |
| Max. continuous working voltage | EBS2U-60/C10/1P/140, 100PCS. | |
| Quantity | | |

www.timax-electric.com www.timax-electric.com 004